


SPECIFICATIONS

Satellite Signals Tracked Simultaneously		
Signal tracking	496 channels	
	BDS B1,B2,B3	
	GPS L1C/A,L1C,L2C,L2E,L2P,L5	
	GLONASS L1C/A,L1P,L2C/A,L2P,L3	
	QZSS L1C/A,L1 SAIF, L1C,L2C,L5,LEX	
	SBAS L1C/A,L5	
GNSS features	Galileo Glove-A and Glove-B, E1, E5A, E5B, E5AltBOC, E6	
	Positioning output rate: 1Hz~50Hz	
	Initialization time: <10s	
	Initialization reliability: >99.99%	
Positioning precision		
Code differential GNSS positioning	Horizontal: ±0.25m+1ppm	Vertical: ±0.50m+1ppm
SBAS positioning	Typically<5m 3DRMS	
High-Precision Static	Horizontal: ±3mm+0.1ppm	Vertical: ±3.5mm+0.4ppm
Static and Fast Static	Horizontal: ±2.5mm+0.5ppm	Vertical: ±5mm+0.5ppm
UHF RTK	Horizontal: ±8mm+1ppm	Vertical: ±15mm+1ppm
Network RTK	Horizontal: ±8mm+0.5ppm	Vertical: ±15mm+0.5ppm
RTK initialization time	2~8s	
User interaction		
Operating System	Linux	
Buttons	Double Button Operation	
Indicators	Four Indicator Lights	
Web UI	Freely configure and monitor the receiver by accessing to the web server via Wi-Fi or USB	
Voice guide	iVoice intelligent voice technology provides status and voice guide	
	Supporting Chinese, English, Korean, Russian, Portuguese, Spanish, Turkish and user defined language	
Secondary development	Providing secondary development kit	
Hardware performance		
Dimension	130mm(Diameter)x85.3mm(Height)	
Weight	820g	
Material	Magnesium aluminum alloy shell	
Operating	-45°C~-70°C	
Storage	-55°C~+85°C	
Humidity	100% Non-condensing	
Waterproof	IP67 standard, protected from short time immersion to depth of 1m	
Dustproof	IP67 standard, fully protected against blowing dust	
Shock and vibration	Withstand 2 meters pole drop onto the cement ground naturally	
Battery	6800mAh, Li-ion battery built in, 7.4V	
Battery life	10-14hours (Supporting external battery)	
Communications		
I/O port	5PIN LEMO external power port+RS232, 7PIN external USB(OTG)+Ethernet	
	1 radio antenna interface	
Wireless modem	Built-in radio for receiving	
Frequency Range	410-470MHz	
Communication Protocol	TrimTalk450s, TrimMark3, SOUTH (KOLIDA)	
Double Module Bluetooth	BLEBluetooth 4.0 standard, support for android, ios cellphone connection	
	Bluetooth 2.1+EDR standard	
NFC Communication	Realizing close range (shorter than 10cm) automatic pair between receiver and controller	
	(controller equipped NFC wireless communication module needed)	
External Devices	Optional external GPRS/EDGE dual-mode communication module, switchable;	
	allow to connect external WLAN card	
WIFI		
Standard	802.11 b/g standard	
WIFI Hotspot	The WIFI hotspot allows smart mobile terminal to connect and access to the internal webserver to control and monitor receiver	
WIFI data link	To work as the datalink that receiver is able to broadcast and receive differential data via WIFI	
Data storage/ Transmission		
Data Storage	8GB SSD internal storage	
	Support external USB storage (up to 32 GB) and automatical cycle storage	
	Changeable record interval, up to 50Hz raw data collection	
Data Transmission	USB data transmission, supporting FTP/HTTP data download	
Data Format	Differential data format: CMR+, CMRx, RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2	
	GPS output data format: NMEA 0183, PJK plane coordinates, Binary code, Trimble GSOF	
	Network model support: VRS, FKP, MAC, fully support NTRIP protocol	
Inertial sensing system		
Electronic bubble	Controller software displays electronic bubble, user can check leveling status of the centering rod real time	
Thermometer	Built-in thermometer sensors, features intelligent temperature control technology which can monitor and adjust the temperature of receiver in real time	



SuperRTK K3

496 Channels, Smallest Full Function RTK Ever  
Enhanced BEIDOU Signal Processing Ability  
14 Hours Continuous Working  
Web UI, Wifi, E-Bubble

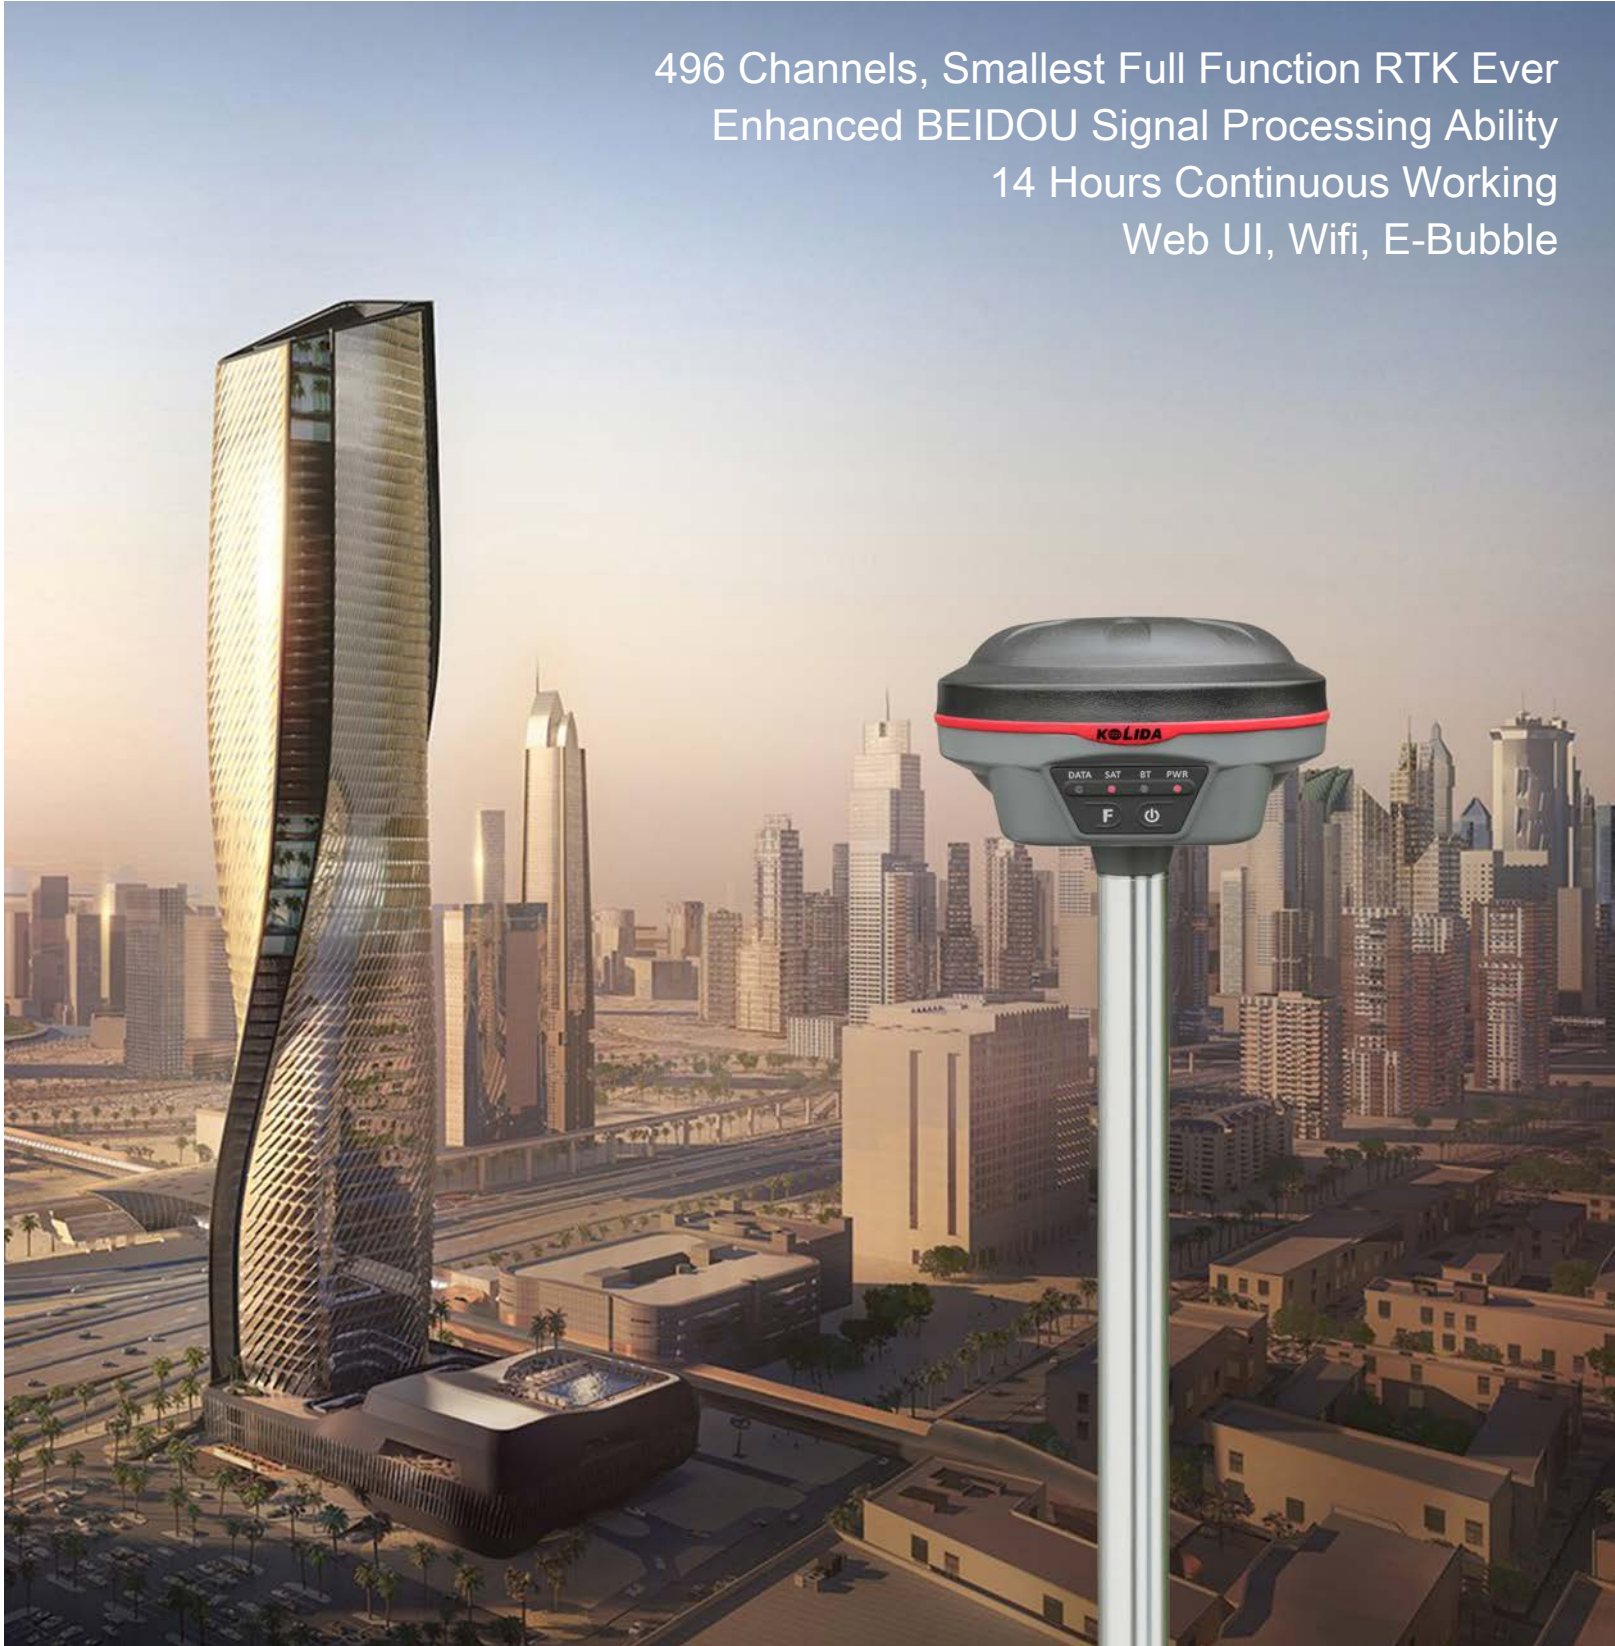

**GUANGDONG KOLIDA INSTRUMENT CO., LTD.**  
Add: 7/F, South Geo-information Industrial Park, No.39 Si Cheng Road, Tian He IBD, Guangzhou 510663, China  
Tel: +86-20-22139033      Fax: +86-20-22139032  
Email: export@kolidainstrument.com      market@kolidainstrument.com      http://www.kolidainstrument.com



# 496 Channels Full constellations

K3 is equipped with a high performance 496 channels GNSS board and capable of supporting multiple satellite constellations: GPS, GLONASS, BEIDOU and GALILEO, including the latest Beidou-3 system.



## Small As an Apple


The diameter of the K3 is only 13cm, height only 8.53cm, and the weight is only 820g. It is as small as an apple that you can even put it into your pocket.

# New Integration Technology New Level of Stability

GNSS antenna, Bluetooth, wifi module are integrated into one board, which helps to save the internal space of K3, making the signal better and performance more stable.



## The Smallest UHF Radio in the History

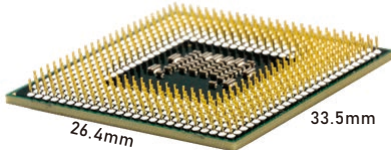

The latest micro UHF receiving module has high sensitivity and low power consumption.

# Magnesium Aluminum Alloy Shell Is Shatter Resistant

K3 is able to withstand 2 meters pole drop onto the cement ground naturally and fully protected against blowing dust.



## Energized Battery Increased Working Time

4 hours quick charge is enough to enable K3 a 14 hours of using time.

## Other Features

Linux OS	Web UI	WIFI	Electronic Bubble
410-470MHZ Radio	8G SSD Storage	OTG FIELD DATA DOWNLOAD	NFC
Bluetooth 4.0+2.1	Mobile Reference Station (WIFI)		

## New Case, More Portable



The light weighted case for K3 is stable and wear resistant.

## Data Collector. Simply Trustable



### T17N

- Windows Mobile 6.5
- 1Ghz CPU, RAM 512MB
- 1GB ROM, Extendable to 32GB
- 3.7V, 6500mAh removable Li-ion
- 3.7 Inch, 480X640VGA
- WCDMA
- Include EGSTAR3.0



### H3PLUS

- Android 6.0
- Quad-core 1.3GHz CPU, 2GB RAM
- 4.3 Inches, WVGA 800X480dpi
- 8 megapixel camera with auto focus
- 6500mAh, up to 10Hours
- Dual SIM Card
- 4G FDD TDD network, 3G WCDMA
- GPS\GLONASS\SBAS\A-GPS
- Include EGSTAR

## New app. New Productivity

### SurvX Android

Windows CE data controller is too old technology? No problem. Simply download SurvX App on your smart phone or tablet. Enjoy the smooth operation of Android platform !



### Seamless Connection

- NFC
- Saving-Time Bluetooth Search
- Auto Connection

### Intuitive interactive design

- Reducing mistakenly touching
- User define program menu
- Signal strength graphic display

### Rich & Practical Programs

- CAD function & Line work
- 3D display mode
- Road & Power line program

### Creativity

- Saving & Sharing coordinate system by QR code
- Data recovery & Encryption function
- Support Google map and other base map

## Post-processing SW. Free of Charge

### KOLIDA GEO Office

Integrates static data processing and kinematic data adjustment



### Intelligent

- Antenna manager with popular receiver types.
- Fast processing and clear display
- Manually edit and filter satellite data for best result
- Update online.

### Versatile

- Compatible with numerous data format.
- Export abundant types of report.
- Transformable to RINEX format