

## SPECIFICATIONS

Satellite Signals Tracked Simultaneously	
Signal tracking	220 channels BDS B1,B2,B3 GPS L1C/A,L1C,L2C,L2E,L5 GLONASS L1C/A,L1P,L2C/A,L2P,L3 SBAS L1C/A,L5 (just for the satellites supporting L5) Galileo GIOVE-A,GIOVE-B,E1,E5A,E5B
GNSS features	Positioning output rate: 1Hz~50Hz Initialization time: <10s Initialization reliability: >99.99%
Positioning precision	
Code differential GNSS positioning	Horizontal: $\pm 0.25m+1ppm$ Vertical: $\pm 0.50m+1ppm$ SBAS positioning accuracy: typically <5m 3DRMS
Static GNSS surveying	Horizontal: $\pm 2.5mm+0.5ppm$ Vertical: $\pm 5mm+0.5ppm$
Real-time kinematic surveying	Horizontal: $\pm 8mm+1ppm$ Vertical: $\pm 15mm+1ppm$
Network RTK	Horizontal: $\pm 8mm+0.5ppm$ Vertical: $\pm 15mm+0.5ppm$
RTK initialization time	2~8s
User interaction	
Operating Time	Linux
Buttons	Double Button Operation
Indicators	Five Indicator Lights
Web UI	Freely to configure and monitor the receiver by accessing to the web server via Wi-Fi or USB
Voice guide	iVoice intelligent voice technology provides status and voice guide Supporting Chinese, English, Korean, Russian, Portuguese, Spanish, Turkish and user define
Secondary development	Providing secondary development kit
Hardware performance	
Dimension(WxH)	143mmX130mm
Weight	1.43kg (2 Batteries included)
Material	Magnesium aluminum alloy shell
Operating	-45°C~+60°C
Storage	-55°C~+85°C
Humidity	100% Non-condensing
Waterproof/Dustproof	IP67 standard, protected from short time immersion to depth of 1m IP67 standard, fully protected against blowing dust
Shock and vibration	Withstand 2 meters pole drop onto the cement ground naturally
Power Supply	9-25V DC, overvoltage protection
Battery	Rechargeable, Lithium-ion battery, 7.4V, Dual batteries hot-swappable
Battery life	Dual batteries:>14h (static mode), >10h (internal UHF base mode), >12h (rover mode)
Communications	
I/O port	5PIN LEMO external power port+RS232, 7PIN external USB(OTG)+Ethernet 1 radio antenna interface, SIM card slot
Wireless modem	Built-in radio, 1W/2W/3W switchable, typically work range can be 8km Barrier-Free" Measurement Technology: Repeater/ Router/ CSD mode
Frequency Range	410-470MHz
Communication Protocol	TrimTalk450s, TrimMark3, SOUTH (KOLIDA)
Cellular Mobile Network	WCDMA/CDMA2000/TDD-LTE/FDD-LTE 4G network modem, downward compatible with 3G GPRS/EDGE
Double Module Bluetooth	BLEBluetooth 4.0 standard, support for android, ios cellphone connection Bluetooth 2.1+EDR standard
NFC Communication	Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller equipped NFC wireless communication module needed)
External Devices	Optional external GPRS/EDGE dual-mode communication module, switchable; allow to connect external WLAN card
WIFI	
Standard	802.11 b/g standard
WIFI Hotspot	The WIFI hotspot allows smart mobile terminal to connect and access to the internal webserver to control and monitor receiver
WIFI data link	To work as the datalink that receiver is able to broadcast and receive differential data via WIFI
Data storage/ Transmission	
Data Storage	8GB SSD internal storage Support external USB storage (up to 32 GB) and automatic cycle storage Changeable record interval, up to 50Hz raw data collection
Data Transmission	USB data transmission, supporting FTP/HTTP data download
Data Format	Differential data format: CMR+, CMRx, RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2 GPS output data format: NMEA 0183, PJK plane coordinates, Binary code, Trimble GSOF Network model support: VRS, FKP, MAC, fully support NTRIP protocol
Inertial sensing system	
Tilt survey	Built-in tilt compensator, correcting coordinates automatically according to the tilt direction and angle of the centering rod
Electronic bubble	Controller software display electronic bubble, checking leveling status of the centering rod real time
Thermometer	Built-in thermometer sensors, adopting intelligent temperature control technology which can monitor and adjust the temperature of receiver in real time

**KOLIDA**  
Professional's Choice

**SUPER RTK**  
K5 Plus+



When other receivers  
Lost **SIGNAL,**  
It is still on  
the **JOB!**

**KOLIDA**  
Professional's Choice

**GUANGDONG KOLIDA INSTRUMENT CO., LTD.**

Add: 7/F, South Geo-information Industrial Park, No.39 Si Cheng Road, Tian He IBD, Guangzhou 510663, China  
Tel: +86-20-22139033 Fax: +86-20-22139032  
Email: export@kolidainstrument.com http://www.kolidainstrument.com



# SUPER RTK K5 Plus+

The best signal acquisition ability


SUPER RTK is far ahead of ordinary GNSS receivers.

Its mission area could be much bigger than others. It works where other receivers lose signal. It gives you total freedom: Web UI & SMS control, smart Apps, OTG field download.

Even, it can transform into Continuously Operating Reference Station.

Exceed the limitation, Release your potential, SUPER RTK.

## Key Features



### - Barrier-Free Measurement

In difficult environment you may lost connection with base station or VRS network. Don't be disappointed, you can choose from 3 creative work modes to continue surveying without interruption. (Repeater/ Router/ CSD)



### - Long Range Radio Link

SDL400 built-in radio can send signal as far as 7 km in urban area, 8 km in suburban. The maximum coverage is up to 200 sq.km, suitable to have multiple rovers work simultaneously.



### - Anti-interference

SDL400 built-in radio features anti-interference capability, so K5plus+ can work close to power plant, transformer substation, mobile signal tower and other interference source.



### - The Best in Town

To improve the performance in city survey, R&D team upgraded the network module from 3G to 4G. Under 4G mobile network, data transmission is faster and more stable. SUPER RTK is still compatible with 3G and 2G.

## Other Features

Multi-Constellation	8KM Radio Range	410-470 Radio Frequency
SMS Remote Control	Tilt Survey	Electronic Bubble
Linux OS	WIFI	WEB UI
8G SSD Storage	OTG	Bluetooth 4.0
<b>Dual Batteries Hot-swappable</b>	<b>Mobile Internet Reference Station</b>	

## Data Collector. Simply Trustable



### T17N

- Windows Mobile 6.5
- 1Ghz CPU, RAM 512MB
- 1GB ROM, Extension to 32GB
- 3.7V, 6500mAh removable Li-ion
- 3.7 Inch, 480X640VGA
- WCDMA
- Include EGSTAR3.0



### H3PLUS

- Android 6.0
- Quad-core 1.3GHz CPU, 2GB RAM
- 4.3 Inches, WVGA 800X480dpi
- 8 megapixel camera with auto focus
- 6500mAh, up to 10Hours
- Dual SIM Card
- 4G FDD TDD network, 3G WCDMA
- GPS/IGLONASS/SBAS/A-GPS
- Include EGSTAR

## New app. New Productivity

### SurvX Android

Windows CE data controller is too old technology? No problem.

Simply download SurvX App on your smart phone or tablet.

Enjoy the smooth operation of Android platform !



Seamless Connection

- NFC
- Saving-Time Bluetooth Search
- Auto Connection

Rich & Practical Programs

- CAD function & Line work
- 3D display mode
- Road & Power line program

Intuitive interactive design

- Reducing mistakenly touching
- User define program menu
- Signal strength graphic display


Creativity

- Saving & Sharing coordinate system by QR code
- Data recovery & Encryption function
- Support Google map and other base map

## Post-processing SW. Free of Charge

### KOLIDA GEO Office

Integrates static data processing and kinematic data adjustment

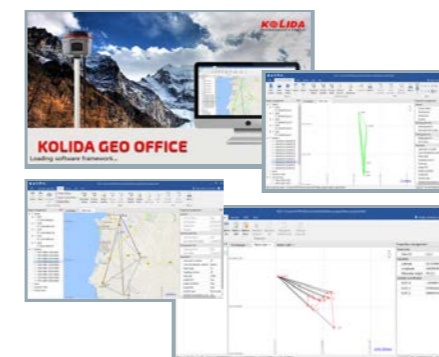

Intelligent

- Antenna manager with popular receiver types.
- Fast processing and clear display
- Manually edit and filter satellite data for best result
- Update online.

Versatile

- Compatible with numerous data format.
- Export abundant types of report.
- Transformable to RINEX format